
GC Application



Diesel Fuel on ZB-5HT

Column: Phase: Dimensions: Order No: Oven Profile:	Zebron™ ZB-5HT, GC Cap. Column 15 m x 0.32 mm x 0.10 µm, Ea 5% Phenyl 95% Dimethylpolysiloxane 15 meters x 0.32 mm x 0.1 µm 7EM-G015-02 60°C to 380°C at 35°C/min for 5min	Construction of the second sec
Carrier Gas: Injection: Detection: Analyst Note:	Constant Flow Helium, 2.9 mL/min On-Column :1 0.1 µL @ 63°C Flame Ionization (FID) (400°C) Sample was 0.1mg/mL in dichloromethane	2007 - 2009 RAD 100 Avenues Products used in this application:
16130		

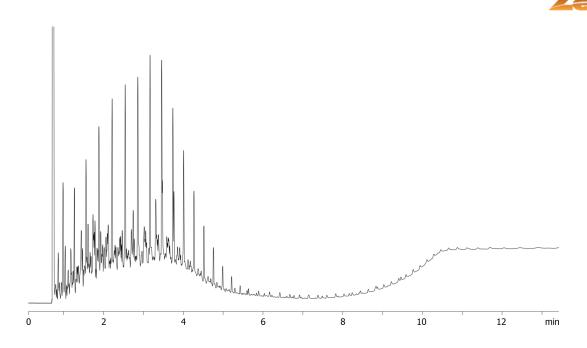

ANALYTES:

1 Diesel fuel

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com.cn

For more information contact your Phenomenex Representative at info@phenomenex.com