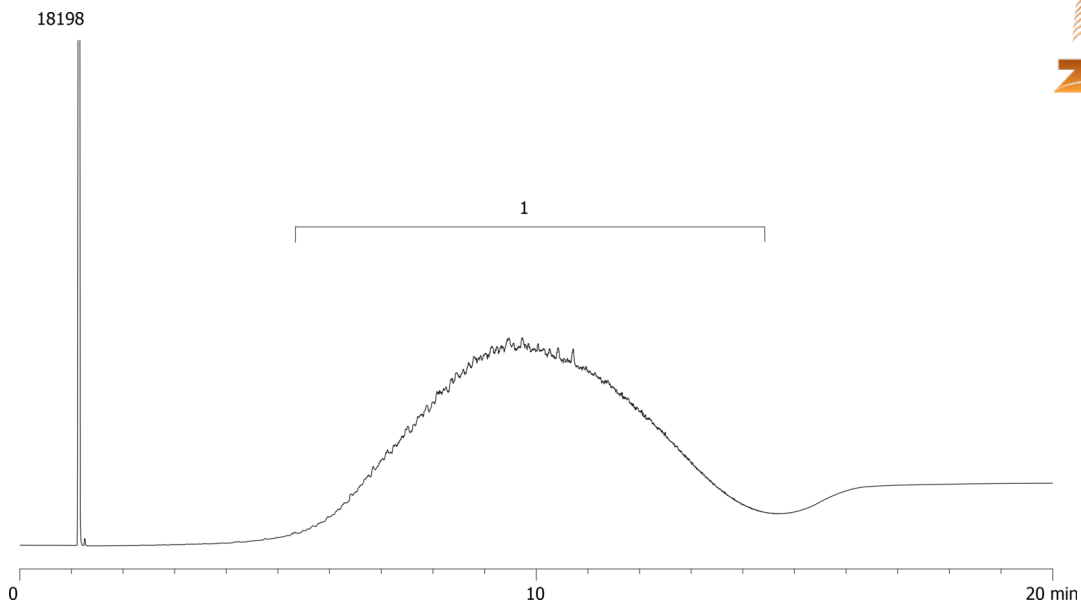


Mineral Oil by FID on ZB-5HT**Column:** Zebron[™] ZB-5HT, GC Cap. Column 30 m x 0.32 mm x 0.10 µm, Ea**Phase:** 5% Phenyl 95% Dimethylpolysiloxane**Dimensions:** 30 meters x 0.32 mm x 0.1 µm**Order No:** 7HM-G015-02**Oven Profile:** 150 °C for 2 min to 420 °C @ 20 °C / min for 4.5 min**Carrier Gas:** Constant Flow Helium, 1.9 mL/min**Injection:** Split 51.575:1 1 µL @ 330°C**Detection:** Flame Ionization (FID) (430°C)**Analyst Note:** Mineral Oil @ 10% in iso-Octane**Products used in this application:****ANALYTES:****1** Mineral oil