

1% Mineral Oil on ZB-5HT by FID

Column: Zebron™ ZB-5HT, GC Cap. Column 30 m x 0.32 mm x 0.10 µm, Ea

Phase: 5% Phenyl 95% Dimethylpolysiloxane

Dimensions: 30 meters x 0.32 mm x 0.1 µm

Order No: 7HM-G015-02

Oven Profile: 150 °C for 2 min to 420 °C @ 20 °C/min for 4.5 min.

Carrier Gas: Constant Flow Helium, 1.9 mL/min


Injection: Split 5:1 1 µL @ 330°C

Detection: Flame Ionization (FID) (435°C)

Analyst Note: Mineral Oil is 1% in Isooctane



Products used in this application:

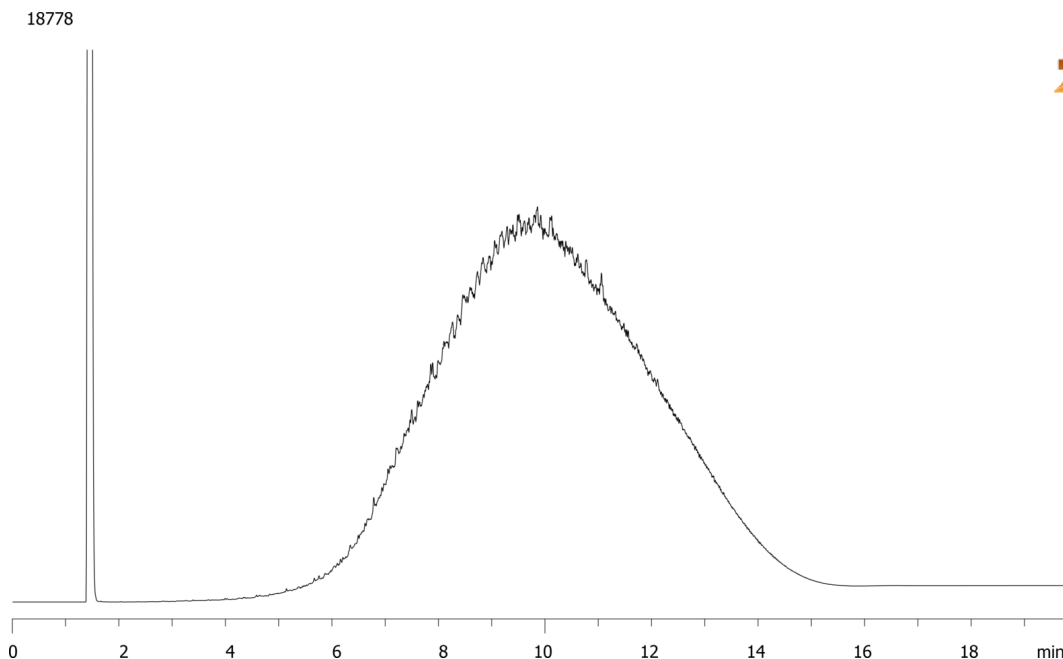

ANALYTES:

- 1 Mineral oil

