GC Application



Column:	Zebron™ ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.09 µm, Ea
Phase:	100% Dimethylpolysiloxane
Dimensions:	5 meters x 0.53 mm x 0.09 µm
Order No:	7AK-G026-55
Oven Profile:	35 °C to 450 °C @ 10 °C/min for 20 min

Carrier Gas:	Constant Flow Helium, 15 mL/min
Injection:	On-Column :1 1 μL @ 38°C
Detection:	Flame Ionization (FID) (450°C)
Analyst Note:	

Analyst Note: Sample is 1% in CS2. Chromatogram is baseline subtracted.


19255



Ophenomenex

Products used in this application:



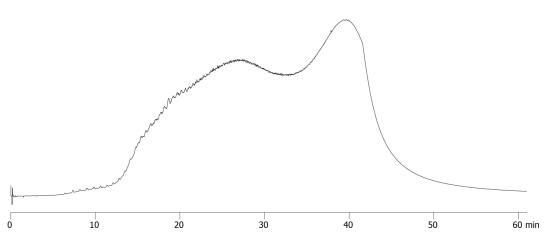

ANALYTES:

1 vacuum bottom distillate

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com.cn

For more information contact your Phenomenex Representative at info@phenomenex.com