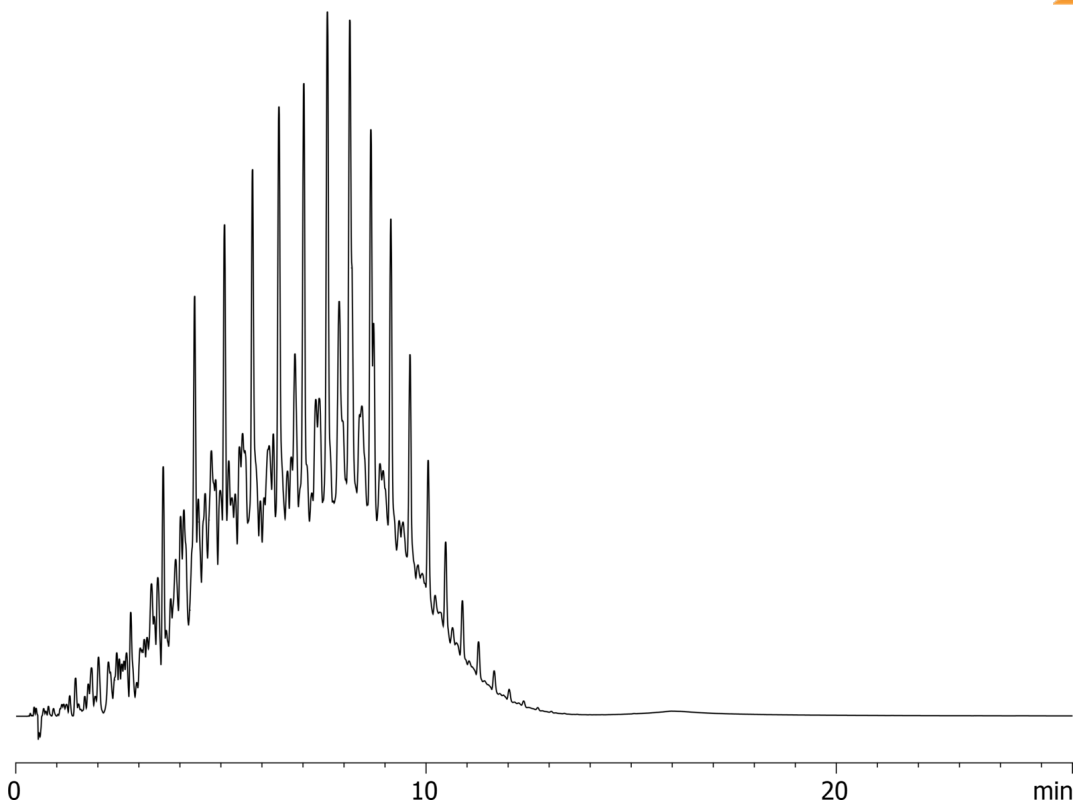


**Diesel Fuel on ZB-1XT 10x0.53x2.65****Column:** Zebtron<sup>™</sup> ZB-1XT SimDist Metal, GC Cap. Column 10 m x 0.53 mm x 2.65  $\mu$ m, Ea**Phase:** 100% Dimethylpolysiloxane**Dimensions:** 10 meters x 0.53 mm x 2.65  $\mu$ m**Order No:** 7CK-G026-35**Oven Profile:** 35 °C to 350 °C @ 20 °C/min for 10 min**Carrier Gas:** Constant Flow Helium, 15 mL/min**Injection:** On-Column :1 0.1  $\mu$ L @ 38°C**Detection:** Flame Ionization (FID) (370°C)**Analyst Note:** Sample was neat, chromatogram is baseline subtracted.**Products used in this application:**

19312

**ANALYTES:****1** Diesel fuel