
## GC Application ID No.: 19603



Column: Phase: Dimensions: Order No: Oven Profile:	Zebron <sup>™</sup> ZB-WAXplus <sup>™</sup> , GC Cap. Column 30 m x 0.25 mm x 0.25 µm, Ea Polyethylene Glycol (PEG) 30 meters x 0.25 mm x 0.25 µm 7HG-G013-11 100°C to 200°C @ 20°C/min post run 250°C for 5 min	Constructed country and Performance with thevy Zelven of Country
Carrier Gas: Injection: Detection: Analyst Note:	Constant Flow Helium, 1.5 mL/min Split 10:1 1 µL @ 250°C Mass Selective (MSD) (250°C) Analytes were extracted from seawater (1mL load at 5ppm) Mass spectrometer is operated in SIM mode: Window 1 (87 (2-butoxyethanol), 89 (IS)), Window 2 (propyleneglycol and IS (31))	Products used in this application:
1960	3	Zebron
Abundance		

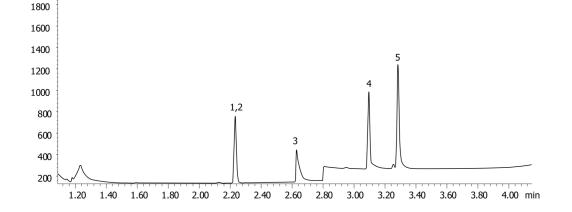

## **ANALYTES:**

- 1 2-Butoxyethanol-d4
- 2 2-Butoxyethanol
- 3 Formic acid
- Propylene glycol 4
- 5 Ethylene glycol

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com.cn

For more information contact your Phenomenex Representative at info@phenomenex.com

ohenomenex