


**ASTM D6352 on Zebron ZB-1XT SimDist****Column:** Zebron<sup>TM</sup> ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.88  $\mu$ m, Ea**Phase:** 100% Dimethylpolysiloxane**Dimensions:** 5 meters x 0.53 mm x 0.88  $\mu$ m**Order No:** 7AK-G026-49**Oven Profile:** 30 C to 410 C at 10 C/min hold for 2 min**Carrier Gas:** Constant Flow Helium, 21.9 mL/min**Injection:** On-Column :1 1  $\mu$ L @ 43°C**Detection:** Flame Ionization (FID) (450°C)**Analyst Note:** Customer sample @ 0.5% in CS<sub>2</sub>**Products used in this application:**

22015

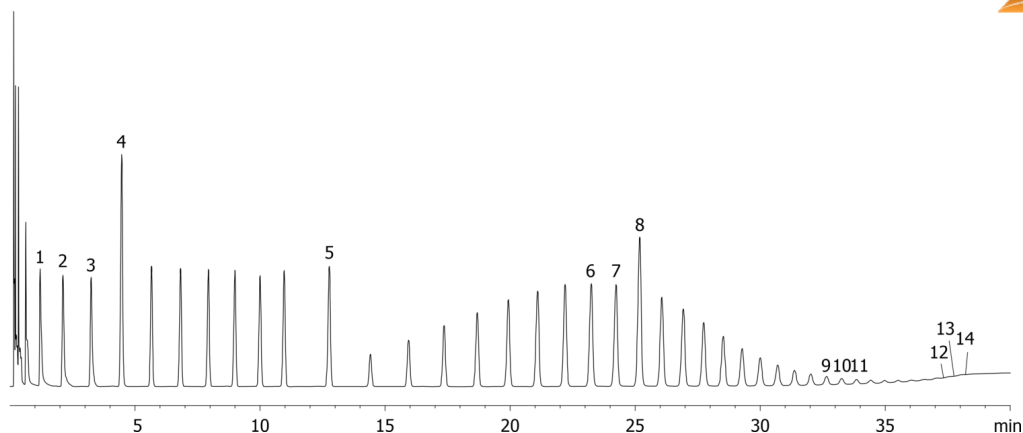

## ASTM D6352 on Zebron ZB-1XT SimDist

### ANALYTES:

- 1 C9
- 2 C10
- 3 C11
- 4 C12
- 5 C20
- 6 C36
- 7 C38
- 8 C40
- 9 C60
- 10 C62
- 11 C64
- 12 C76
- 13 C78
- 14 C80

