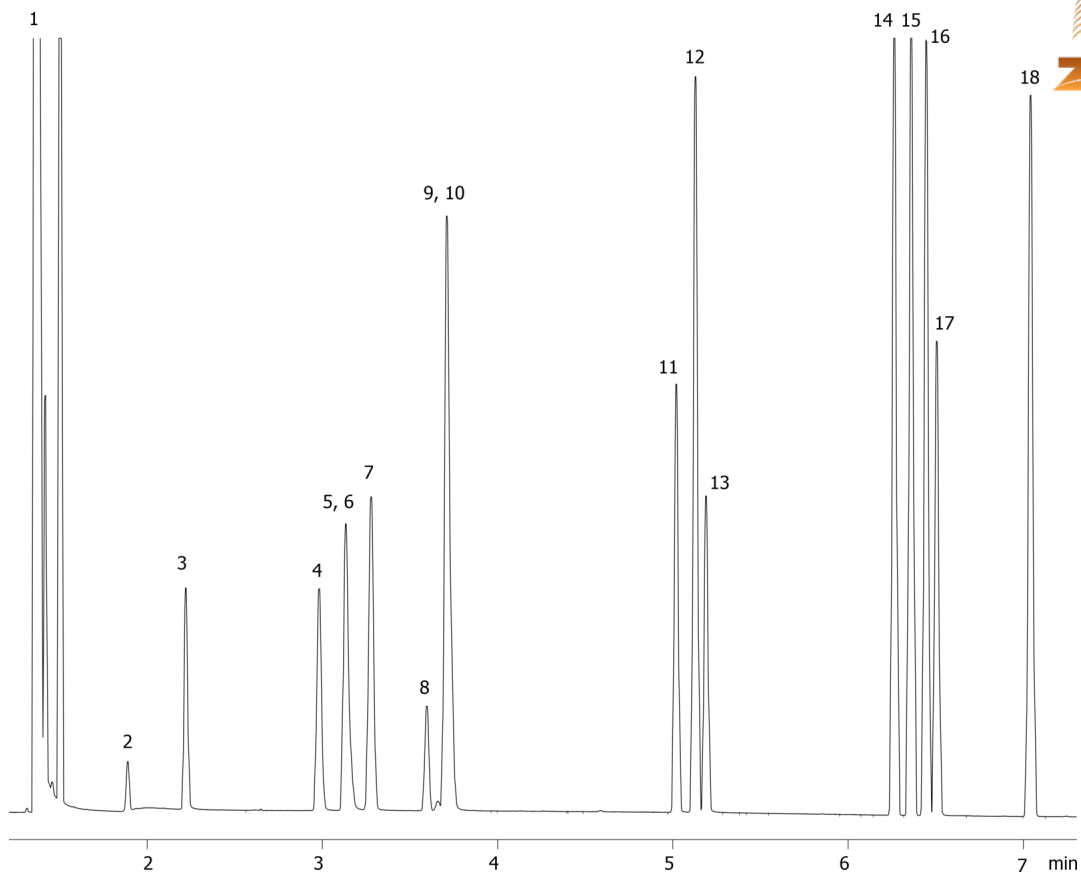


ASTM Method D5135-95: Solvent Analysis on ZB-WAXplus**Column:** Zebron[™] ZB-WAXplus[™], GC Cap. Column 30 m x 0.25 mm x 0.25 μ m, Ea**Phase:** Polyethylene Glycol (PEG)**Dimensions:** 30 meters x 0.25 mm x 0.25 μ m**Order No:** 7HG-G013-11**Oven Profile:** 35°C hold for 3min. to 95°C at 20°C/min. hold for 8min.**Carrier Gas:** Constant Pressure Helium, 1.6 mL/min**Injection:** Split 100:1 0.5 μ L @ 250°C**Detection:** Flame Ionization (FID) (260°C)

16140

**Products used in this application:**

ASTM Method D5135-95: Solvent Analysis on ZB-WAXplus

ANALYTES:

- 1 Pentane
- 2 Methyl formate
- 3 Acetone
- 4 Ethyl acetate
- 5 Methyl ethyl ketone
- 6 Methanol
- 7 2-Methyl-2-propanol
- 8 Methylene chloride
- 9 Benzene
- 10 Ethanol
- 11 2-Butanol
- 12 Toluene
- 13 Propanol
- 14 Ethylbenzene
- 15 p-Xylene
- 16 m-Xylene
- 17 1-Butanol
- 18 o-Xylene

